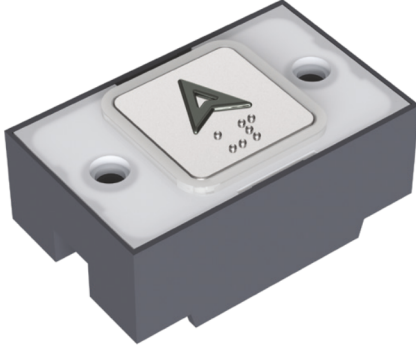


R5**Özellikler / Features****Ölçüler / Dimensions**

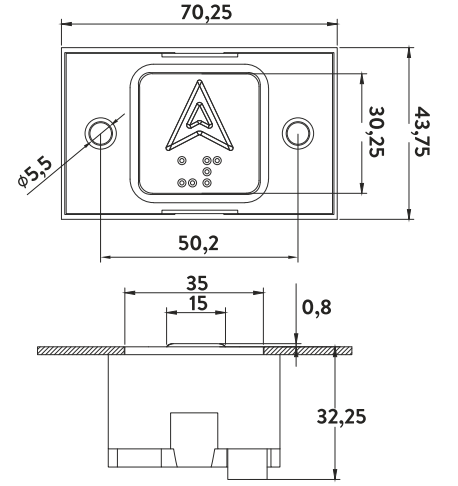

PC gövde (Isıya dayanıklı, tutuşmayan)
Polycarbonate body (fire-resistant plastic)

Kapağa montaj; 2 noktadan M4x25
Faceplate mounted, secured by 2 welded bolts M4x25


1 Microswitch 5A125 VAC -1 NO veya 1 NC
1 Microswitch 5A125 VAC -1 NO or 1 NC

4 SMD LED ile homojen aydınlatma 24 V
Homogeneous halo illumination with 4 SMD leds 24 V


Kabartma semboller (EN81-70 norm)
Raised symbols EN81-70

**Delik ölçüsü / Cutout**

Led renkleri / Recall lights

**Stiller / Styles****T4-ENP.LS.BR****T4-ENS.BR****Bağlantılar / Connections**

4 Klemensli /
4xScrew Terminal



3'lü Soket /
3 Pin socket

